

SLABS

SURFACE
STATEMENTS

Backlit Stone

Ivory Gioiello	6
Golden Ambra	7
Labradorite	8

Stones of Italy

Carrara	9
Nero Onyx	10
Blu Onyx	11
Verdi Onyx	12
Bianco Onyx	13
Rosa Onyx	14
Agata Blu	15
Quartz	16
Calagold	17
Thassos	18
Calabianca	19
Statuarietto	20
Statuario Select	21

Slate Stone

Parchment	22
Grigio	23

COLORS INDEX



IVORY GIOIELLO
PAG. 6



GOLDEN AMBRA
PAG. 7




LABRADORITE
PAG. 8



CARRARA
PAG. 9



NERO ONYX
PAG. 10

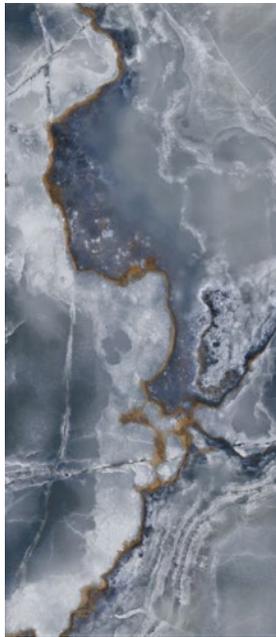

BLU ONYX
PAG. 11



VERDI ONYX
PAG. 12



BIANCO ONYX
PAG. 13



ROSA ONYX
PAG. 14

COLORS INDEX




AGATA BLU
PAG. 15



QUARTZ
PAG. 16



CALAGOLD
PAG. 17

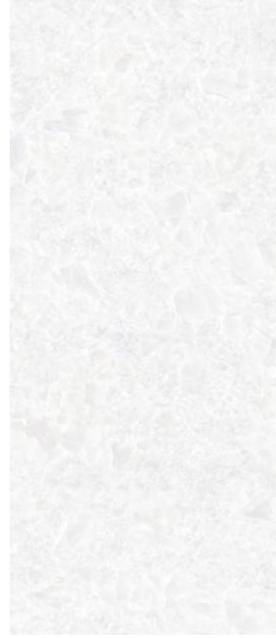

THASSOS
PAG. 18



CALABIANCA
PAG. 19



STATUARIETTO
PAG. 20



STATUARIO SELECT
PAG. 21



PARCHMENT
PAG. 22



GRIGIO
PAG. 23

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

BACKLIT STONE

Ivory Gioiello




IVORY GIOIELLO
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

BACKLIT STONE
Golden Ambra

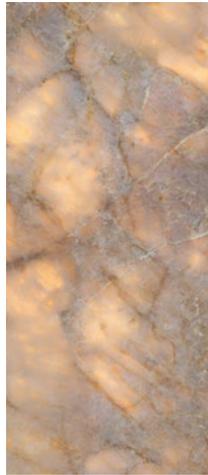



GOLDEN AMBRA
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

BACKLIT STONE

Labradorite

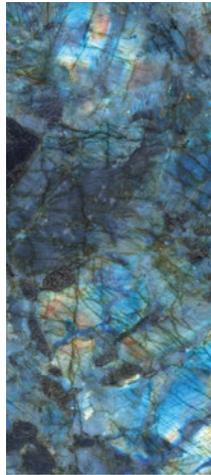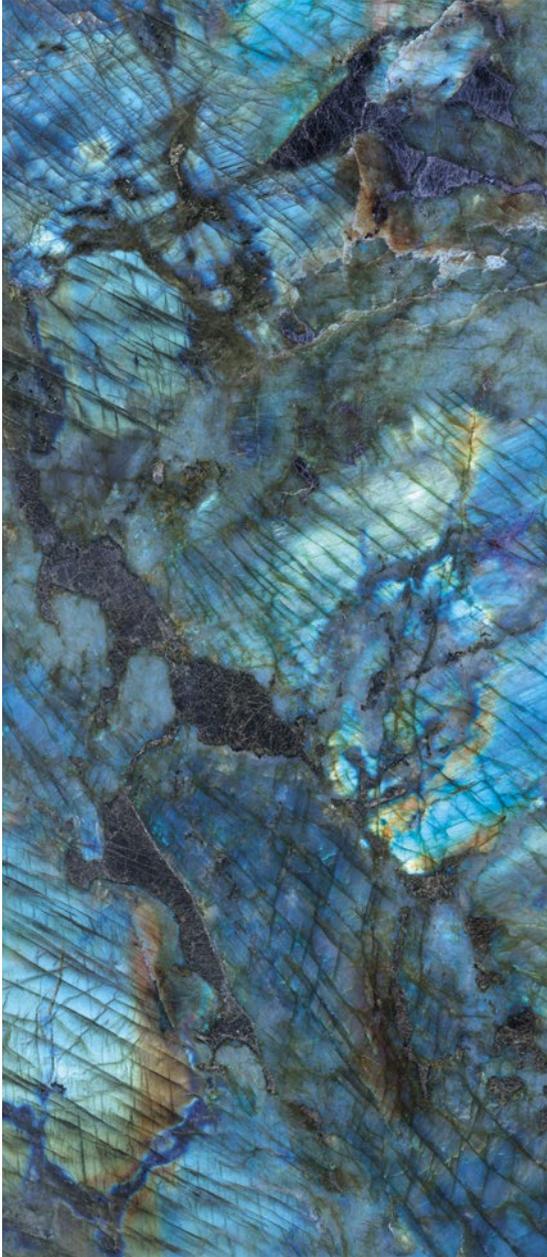



LABRADORITE
6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

CARRARA

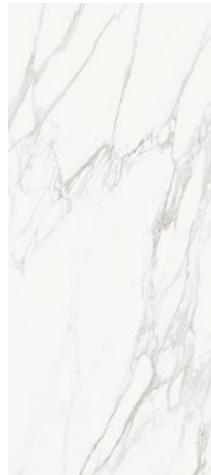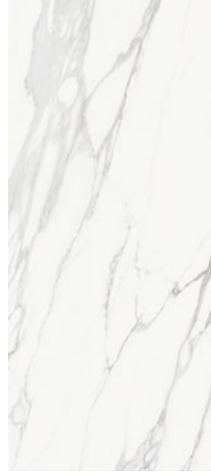






CARRARA
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

NERO ONYX

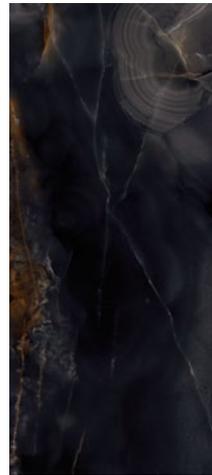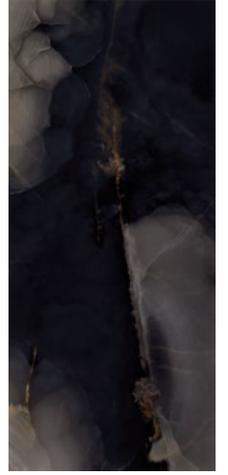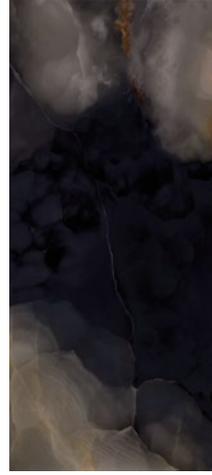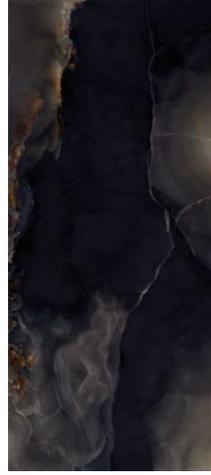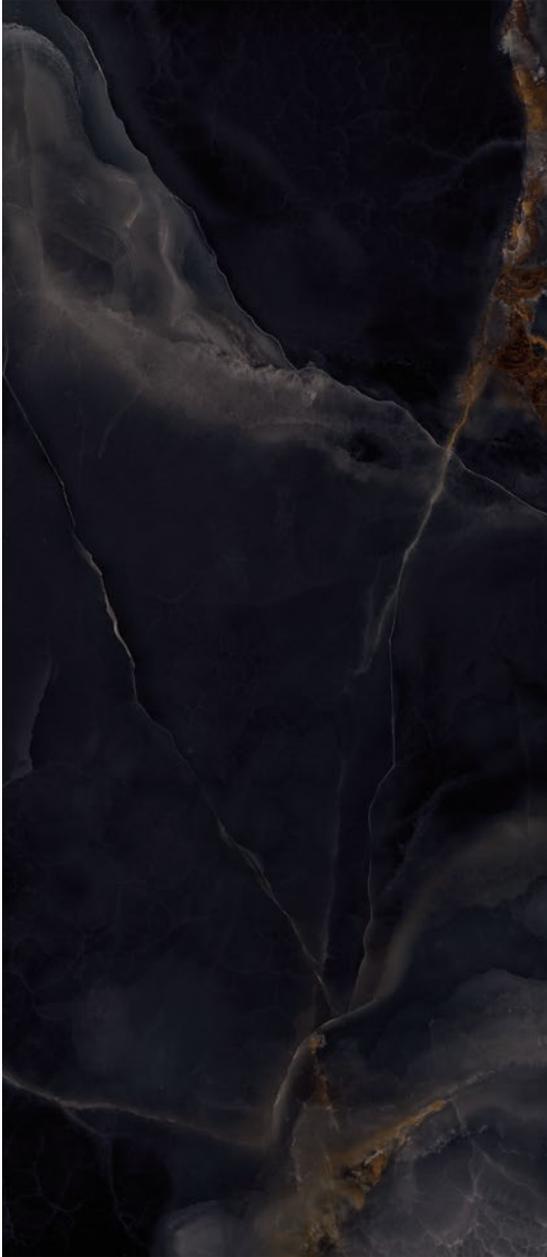


NERO ONYX
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

BLU ONYX

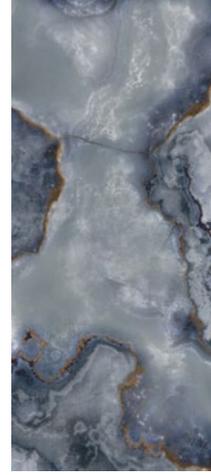

BLU ONYX
6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

VERDI ONYX



VERDI ONYX
6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

BIANCO ONYX



BIANCO ONYX
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

ROSA ONYX



ROSA ONYX

6,5MM (1/4") Rectified

47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")




47 1/4" x 109 7/16"

STONES OF ITALY

AGATA BLU



AGATA BLU
6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

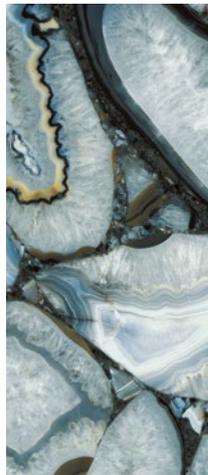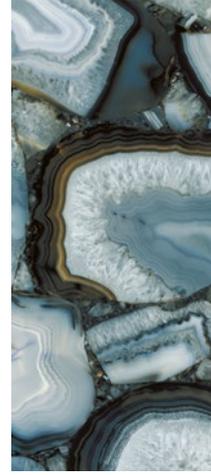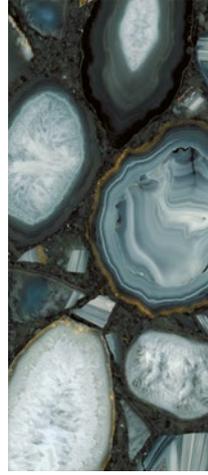

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

QUARTZ



QUARTZ
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

CALAGOLD






CALAGOLD
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

THASSOS

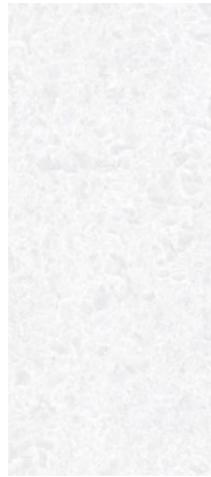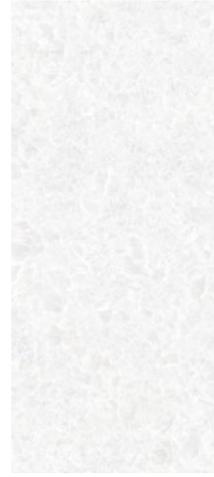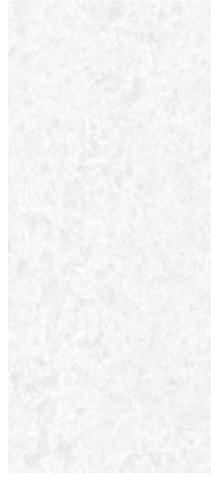

THASSOS
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

CALABIANCA



CALABIANCA
☒ 6,5MM (1/4") Rectified
47 1/4" x 109 7/16" x 1/4" Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY
STATUARIETTO



STATUARIETTO

 6,5MM (1/4") Rectified

47 1/4" x 109 7/16" x 1/4" Natural / Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

STONES OF ITALY

STATUARIO SELECT



STATUARIO SELECT

6,5MM (1/4") Rectified

47 1/4" x 109 7/16" x 1/4" Natural / Polished

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

SLATE STONE

PARCHMENT



PARCHMENT

☒ 6,5MM (1/4") Rectified

47 1/4" x 109 7/16" x 1/4" Natural

SLABS 6,5 mm (1/4")

47 1/4" x 109 7/16"

SLATE STONE

GRIGIO



GRIGIO

6,5MM (1/4") Rectified

47 1/4" x 109 7/16" x 1/4" Natural

6,5 mm (1/4") SLABS

ANSI A.137.3 Gauged Porcelain Tile and Gauged Porcelain Tile Panels/Slabs ISO 13006 EN 14411

BACKLIT STONE | STONES OF ITALY | SLATE STONE

TECHNICAL FEATURES

TECHNICAL FEATURES	TESTING METHOD	VALUES	
		6,5 mm (1/4")	
		Natural	Polished
LENGTH AND WIDTH (A)	UNI EN ISO 10545/2	± 2% (Max 5mm)	± 2% (Max 5mm)
LENGTH AND WIDTH (B)	UNI EN ISO 10545/2	± 0,6% / ± 2,0 mm	± 0,6% / ± 2,0 mm
THICKNESS	UNI EN ISO 10545/2	± 0,5% / ± 0,5 mm	± 0,5% / ± 0,5 mm
EDGE STRAIGHTNESS	UNI EN ISO 10545/2	± 0,5% / ± 1,5 mm	± 0,5% / ± 1,5 mm
ORTHOGONALITY	UNI EN ISO 10545/2	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm
FLATNESS	UNI EN ISO 10545/2	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm
APPEARANCE	UNI EN ISO 10545/2	> 95%	> 95%
WATER ABSORPTION	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant	Conforme Compliant
MODULUS OF RUPTURE	UNI EN ISO 10545/4	≥ 35 N/mm ²	≥ 35 N/mm ²
BREAKING STRENGTH	UNI EN ISO 10545/4 ASTM C648	≥ 700 N 250 Lbs	≥ 700 N 250 Lbs
IMPACT RESISTANCE	UNI EN ISO 10545/5	-	-
RESISTANCE TO SURFACE ABRASION	UNI EN ISO 10545/7	Dark colors: 2-3 Medium colors: 4 Light colors: 5	Dark colors: 2-3 Medium colors: 4 Light colors: 5
LINEAR THERMAL EXPANSION	UNI EN ISO 10545/8	≤ 9x10 ⁻⁶ °C ⁻¹	≤ 9x10 ⁻⁶ °C ⁻¹
THERMAL SHOCK RESISTANCE	UNI EN ISO 10545/9	Conforme	Conforme
HAIR-CRACKING RESISTANCE	UNI EN ISO 10545/11	Conforme	Conforme
FROST RESISTANCE	UNI EN ISO 10545/12 ASTM C1026	Conforme Unaffected	Conforme Unaffected
CHEMICAL RESISTANCE to high and low acid and basic concentrations	UNI EN ISO 10545/13 ASTM C-650	A - LA - LB - HA - HB Unaffected	A - LA - LB - HA - HB Unaffected
STAIN RESISTANCE	UNI EN ISO 10545/14 CTI 81-7D	5 No Evident Variation	5 No Evident Variation
COLOUR RESISTANCE TO LIGHT EXPOSURE	DIN 51094	Conforme	Conforme
RELEASE OF DANGEROUS SUBSTANCES (PIOMBO - CADMIO)	UNI EN ISO 10545/15 (mg/l)	-	-
SLIP RESISTANCE	DIN EN 16165 Annex B	R9	-
	DIN EN 16165 Annex A	Na	-
	ANSI A326.3:2017 DCOF	≥ 0,42	-
	B.C.R.A. D.M. N. 236 14/6/89	> 0,40	-
	AS 4586-2013 Anexo A	Na	-
	BS 7976-2: 2002 BSEN13036-4:2011 Pendulum testers	Na	-
	UNE 41901:2017 EX DB SUA (actual)	Na	-
CALCULATION OF APPARENT DENSITY	UNI EN ISO 14617/1 (Kg/m ³)	-	-
CALCULATION OF WATER ABSORPTION	UNI EN ISO 14617/1 (%)	-	-
BENDING STRENGTH	UNI EN ISO 14617/2 (MPa)	-	-
DEEP ABRASION	UNI EN ISO 14617/4 (mm)	-	-
CALCULATION OF FREEZE	UNI EN ISO 14617/5	-	-
CALCULATION OF THERMAL SHOCK RESISTANCE	UNI EN ISO 14617/6	-	-
IMPACT RESISTANCE	UNI EN ISO 14617/9	-	-
VOLATILE ORGANIC COMPOUND EMISSION TEST	ISO 16000/9	-	-
RESISTANCE TO COLD LIQUIDS	EN 12720:2013	-	-
RESISTANCE TO DAMP HEAT	EN 12721:2013	-	-
RESISTANCE TO DRY HEAT	EN 12722:2013	-	-
DIRT RETENTION	EN 9300:2015	-	-
SCRATCH RESISTANCE	EN 15186:2012 - met. B	-	-
RESISTANCE TO FUNGI s	ASTM G 21	-	-

6,5 mm (1/4") SLABS

ANSI A.137.3 Gauged Porcelain Tile and Gauged Porcelain Tile Panels/Slabs ISO 13006 EN 14411


BACKLIT STONE | STONES OF ITALY | SLATE STONE

PACKAGING

Item	Thickness mm	Size cm	No. of Slabs	Sqm per Pack	Weight of Packaging Kg	Weight of Packaging + Slabs Kg
 47^{1/4}" x 109^{7/16}" A-Frame	6,5	75x290x160h	40	133,44	180	2181,60

SURFACE STATEMENTS

www.surfacestatements.com

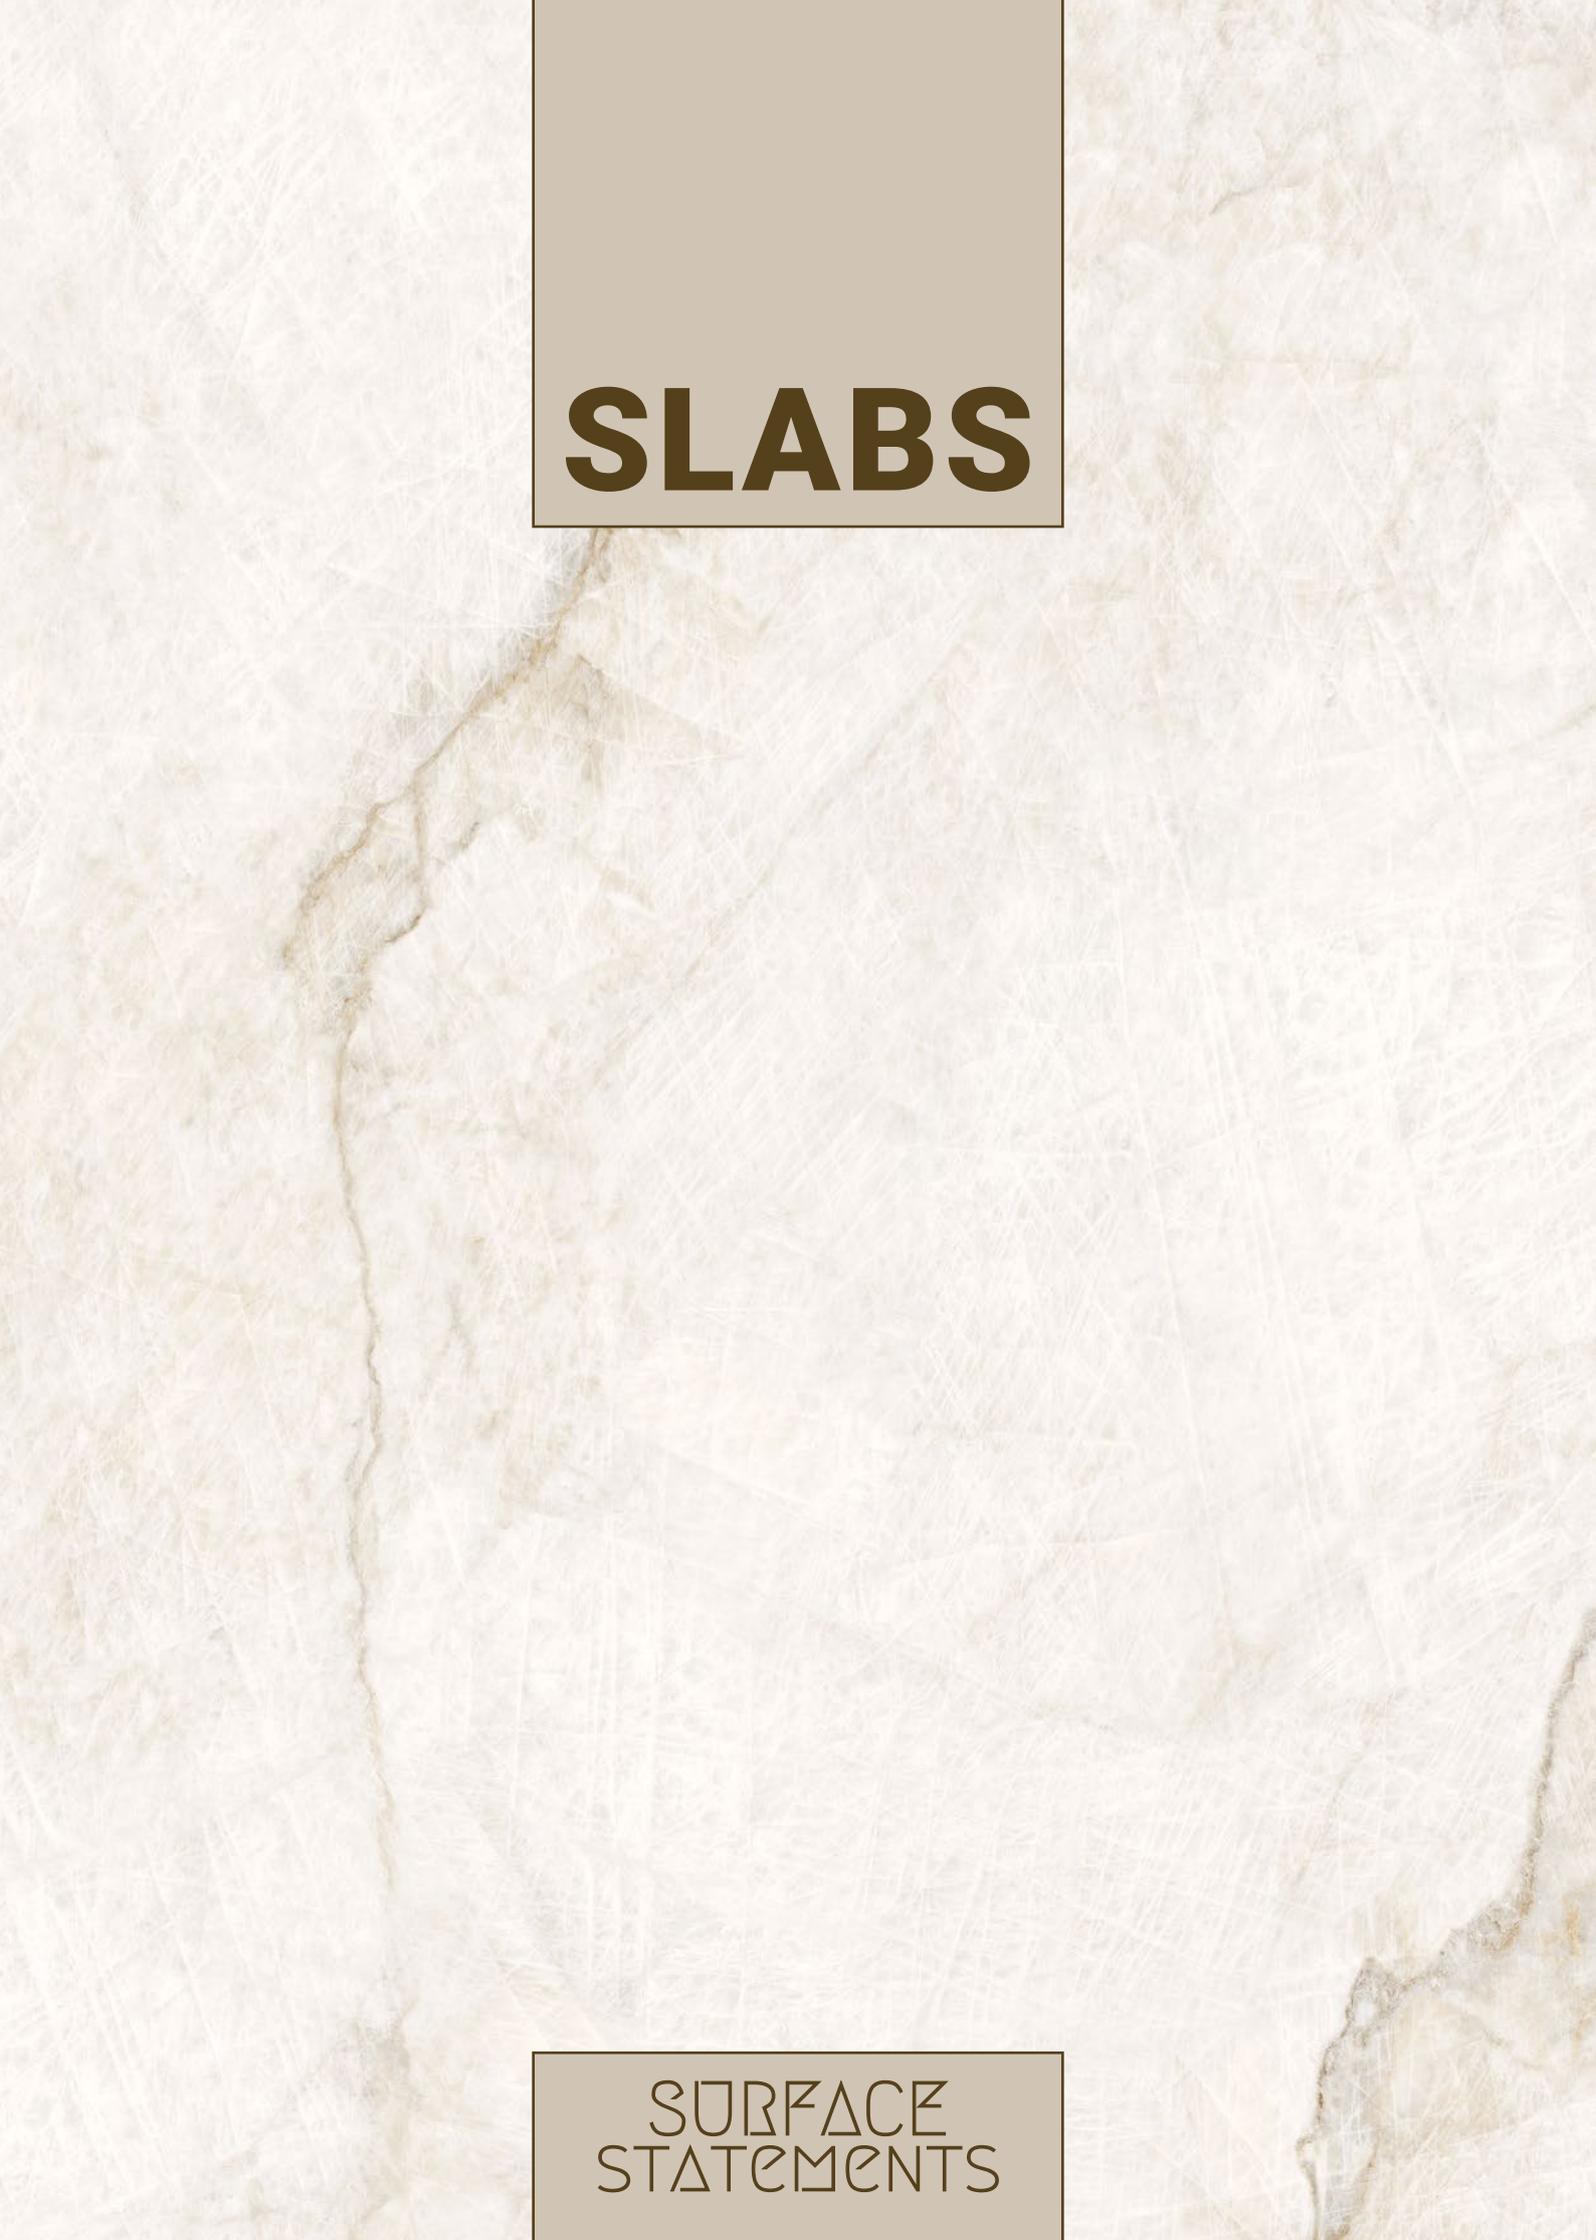

SLABS

SURFACE
STATEMENTS