

# DESIGN STONE



The image shows a modern bathroom interior with a large, light-colored stone bathtub. The floor is made of large, light-colored stone tiles. A wooden vanity with a sink and a chrome faucet is positioned next to the bathtub. A large, textured pendant light hangs above the bathtub. The bathroom has large windows with brown curtains, overlooking a scenic landscape with trees and a field. A small wooden stool with a cup and brush is placed next to the bathtub. The word "DESIGN STONE" is overlaid in a large, bold, brown font. The word "USONIAN" is overlaid in a smaller, brown font at the bottom.


USONIAN



Grigio Fiammata Structured Natural Rectified  $11\frac{13}{16}'' \times 23\frac{5}{8}''$  - Grigio Spazzolata Natural Rectified  $23\frac{5}{8}'' \times 47\frac{1}{4}''$



Mosaic Sabbia 11<sup>13/16"</sup> x 11<sup>13/16"</sup> - Sabbia Spazzolata Natural Rectified 23<sup>5/8"</sup> x 47<sup>1/4"</sup>

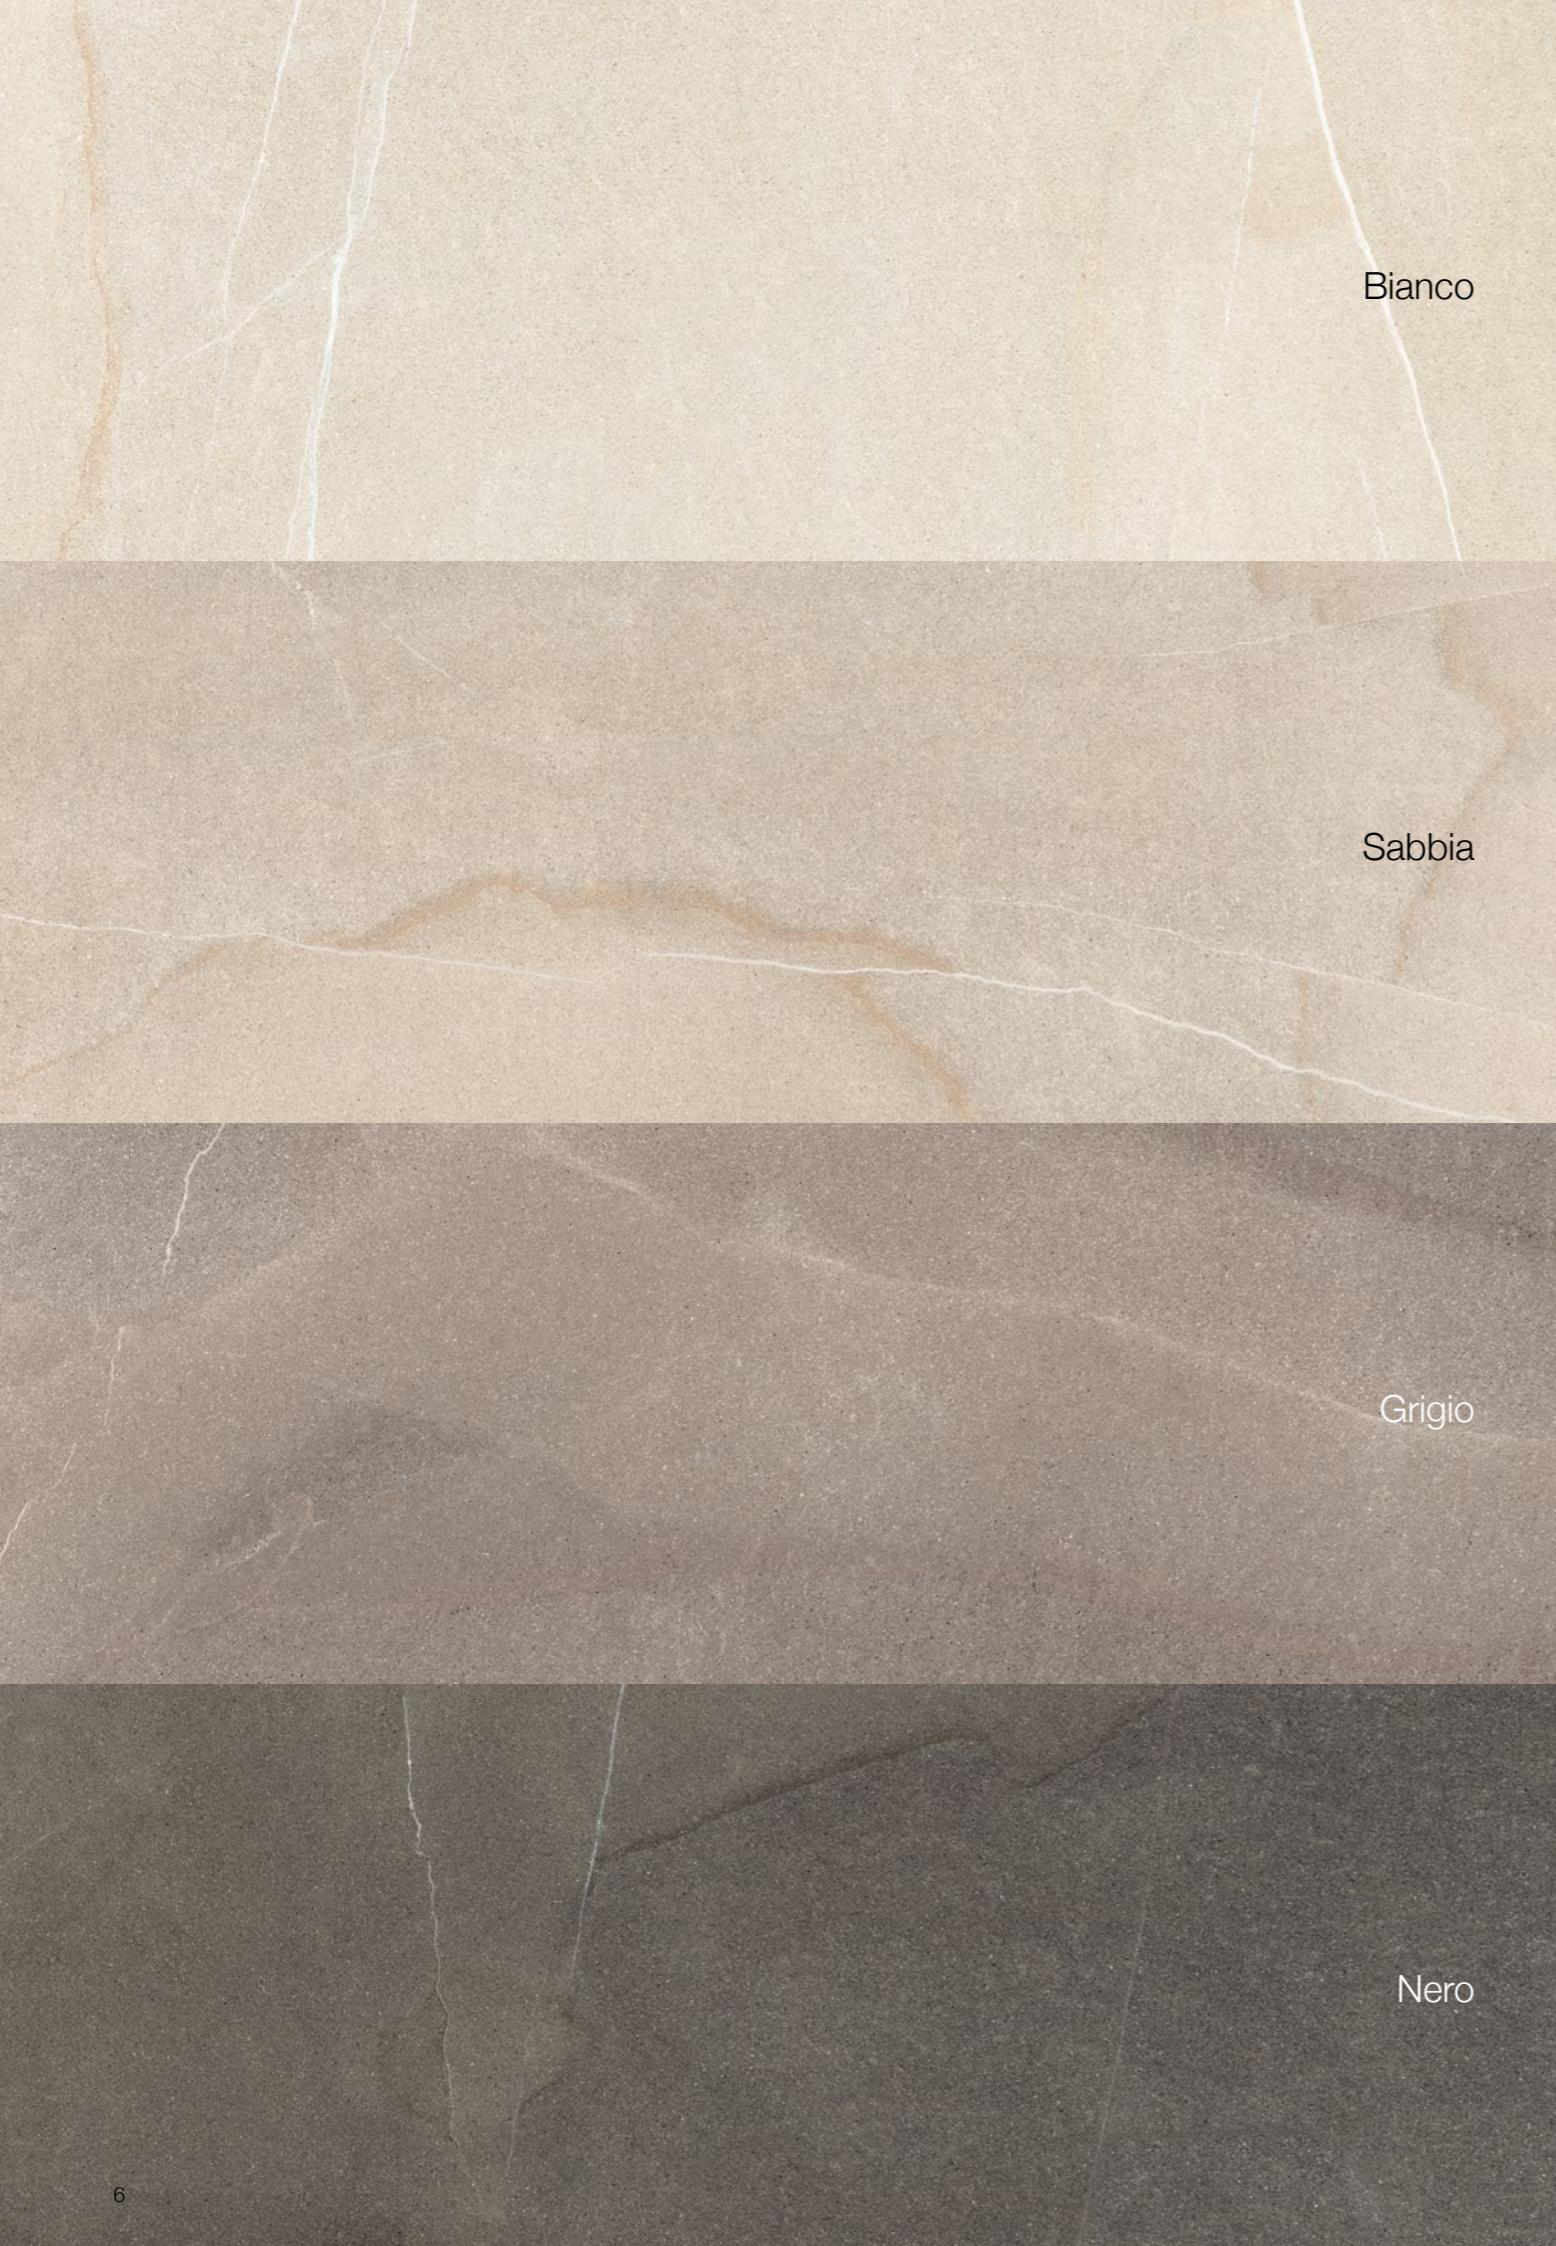

Bianco

Sabbia

Grigio

Nero



# DESIGN STONE

colorbody fine porcelain stoneware - rectified monocaliber




nat



23<sup>5/8</sup>" x 47<sup>1/4</sup>"  
± 9.5 mm



11<sup>13/16</sup>" x 23<sup>5/8</sup>"  
± 8.5 mm



11<sup>13/16</sup>" x 11<sup>13/16</sup>"  
± 8.5 mm

**Mosaic**

## TECH INFO

### COLOUR VARIATIONS



Clearly distinguishable differences in texture and pattern within the same production run.

### DECORATIVE PIECES

#### 3D

Digital technology and high-definition tactile structure

#### Mosaic

Mosaic mesh - mounted on fiberglass

### TRIMS

#### Bullnose

Coved Edge Skirting Tile cut from plain tile

PERFORMANCE CHARACTERISTICS	STANDARD	TEST RESULT	INTENDED USE
<b>Water Absorption</b>	ASTM C373	≤ 0,5	<b>H</b> Materials recommended for relatively heavy abrasion levels, also in premises not protected against abrasive substances
<b>Breaking Strength</b>	ASTM C648 UNI EN ISO 10545/4	≥ 250 lbs ≥ 1300 N	
<b>Frost Resistance</b>	ASTM C1026	Resistant	
<b>Chemical Resistance</b>	ASTM C650	Resistant	
<b>Stain Resistance</b>	UNI 10545-14	Class 5	
<b>Slip Resistance</b>	DIN EN 16165 Annex B	R10	
	DIN EN 16165 Annex A	B (A+B)	
ANSI A326.3:2017 DCOF	WET ≥ 0,50 Spazzolata		
ANSI A326.3:2017 DCOF	WET ≥ 0,50 Fiammata		

### PACKING AND WEIGHT

	box	box	box	box	box	box	box
		SQF	LBS		SQF	LBS	mm
23 <sup>5/8</sup> " x 47 <sup>1/4</sup> "	Spazzolata	2	15.26	64.14	36	549.36	2309.04
11 <sup>13/16</sup> " x 23 <sup>5/8</sup> "	Spazzolata	9	17.00	64.89	32	544.00	2076.48
11 <sup>13/16</sup> " x 23 <sup>5/8</sup> "	Fiammata	9	17.00	64.89	32	544.00	2076.48
11 <sup>13/16</sup> " x 11 <sup>13/16</sup> "	Mosaic (chip 1 <sup>7/8</sup> " x 1 <sup>7/8</sup> ")	10	9.45	32.43	54	510.30	1751.22
2 <sup>3/4</sup> " x 23 <sup>5/8</sup> "	Bullnose	15	-	35.25	48	-	1692.00

Colours and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. Product sizes indicated are nominal and like weights and colours undergo the typical variations of the ceramic process. The manufacturer reserves the right to change the technical and optical features of the materials illustrated at any time and without notice. These features are not legally binding.

**SURFACE  
STATEMENTS**

[www.surfacestatements.com](http://www.surfacestatements.com)

# DESIGN STONE



USONIAN